




PIR-100T Turn Roller (Fixed screw)



Specification	PIR-100T
Power	V1 : AC220V / 45A / 50;60Hz / 3Ø V2 : AC380V / 26A / 50Hz / 3Ø
Load (W)	100,000Kg.
Workpiece Dia.	400 -7,000mm.
Roll speed	120 - 1,200 mm/min
Roll size	D470mm x W475mm
Roller covering material	PU(Polyurethane) / Operating temperature < 70°C
Driver motor	AC3HP * 2pcs
Skew Torque	350 Kg.m
Start control	Pedal switch (Cable 8M length)
Remote control	Hand box (Cable 8M length)
Wireless remote control	Forward/Stop/Reverse, Speed Adj.

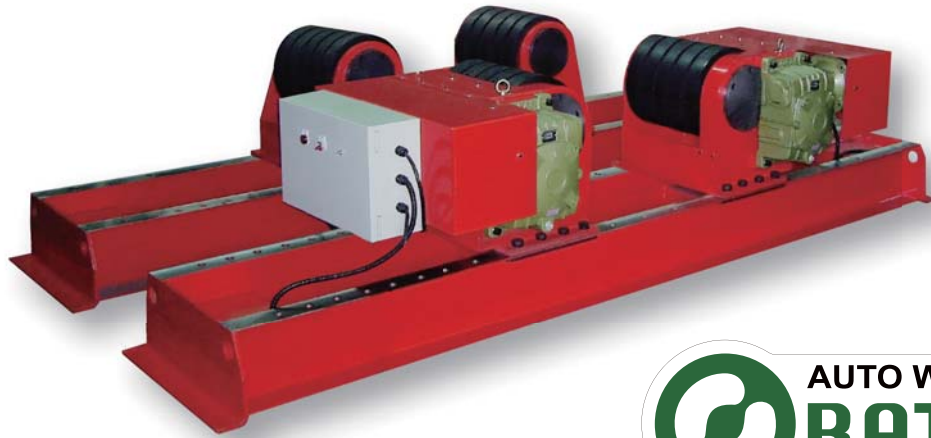

Welder start signal 2T / 2 Cycle

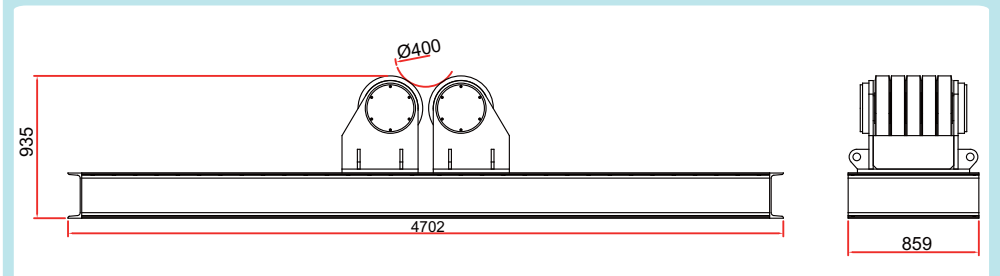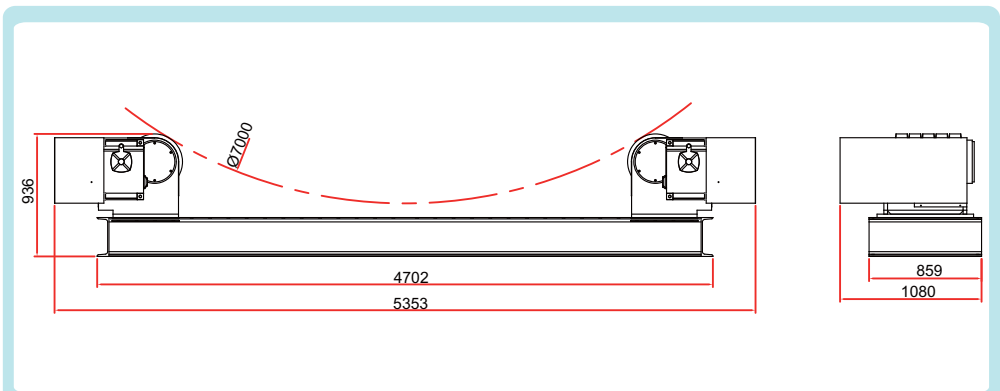

UNIT:mm

