

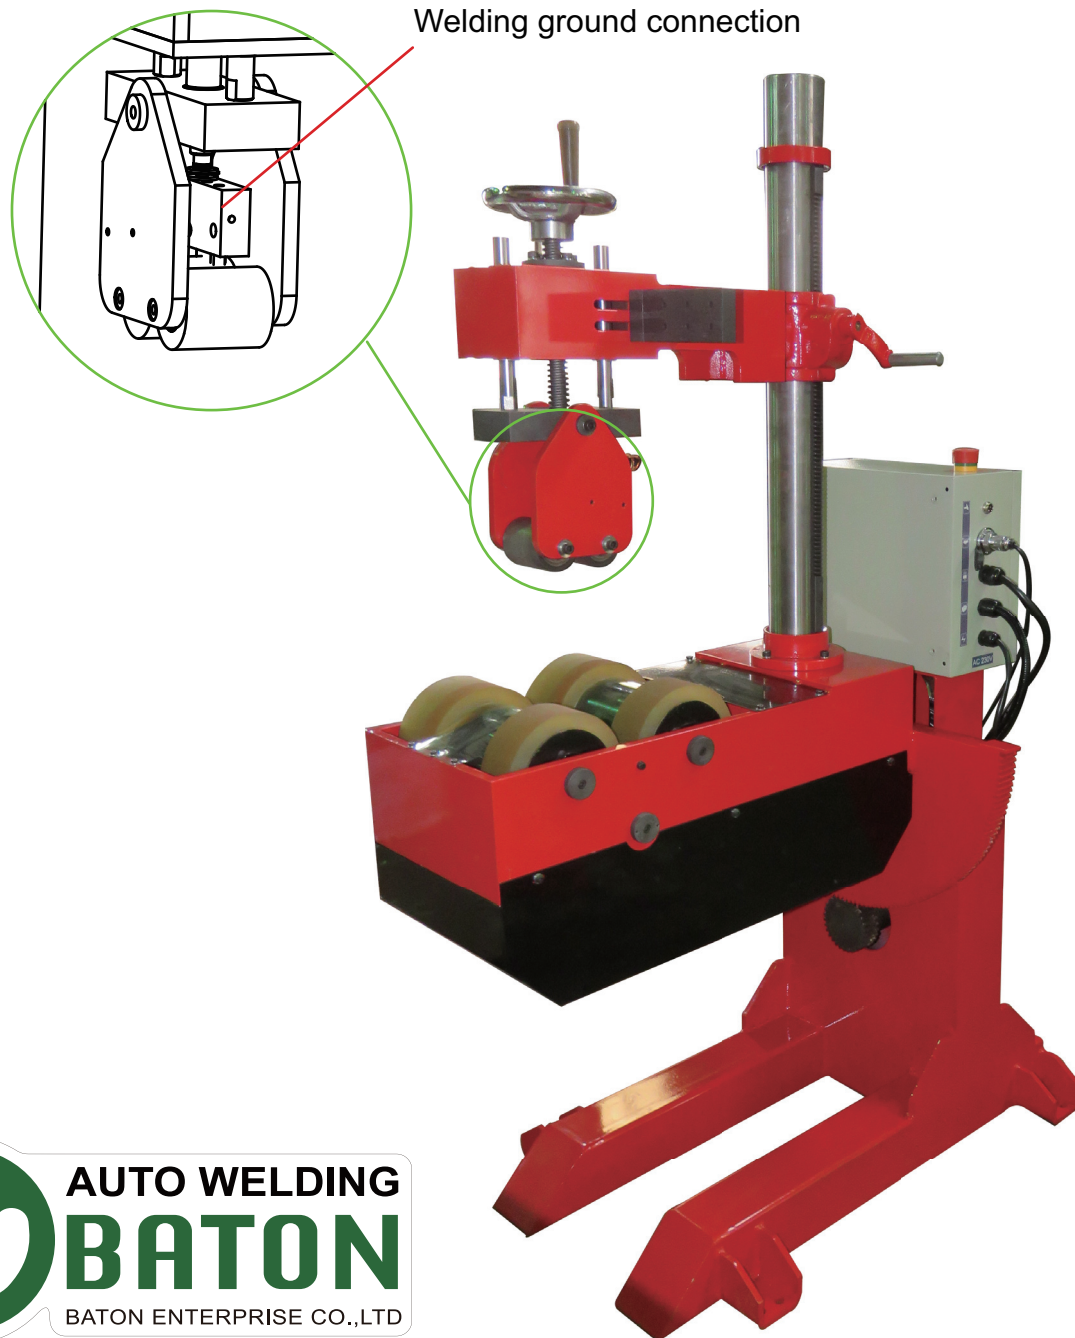






PPR-300 Pipe Roller

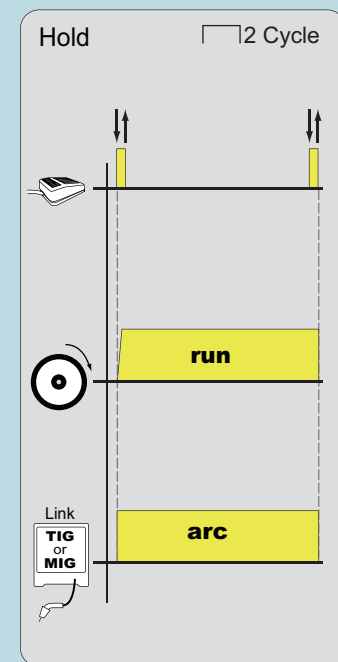

Specification	PPR-300
Power	V1 : AC110V / 10A / 60Hz / 1Ø V2 : AC220V / 8A / 50Hz / 1Ø
Workpiece Dia.	60 - 300mm.
Workpiece length	400mm or more
Capacity (W)	300Kg.
Rotating torque	11.2 Kg.m
Roll speed	130 - 1300 mm/min
Roller drive motor	DC100W/90V DC motor
Tilting range	10° - 170°
Tilting center height	720 mm.
Tilting moment	150 Kg.m
Tilting operate	Manual
Tilting lock	Tenon
Welding current	300A / 100%
Start control	Pedal switch (Cable 3M length)
Remote control	Hand box (Cable 3M length)
Welder start signal	2T / 2 Cycle


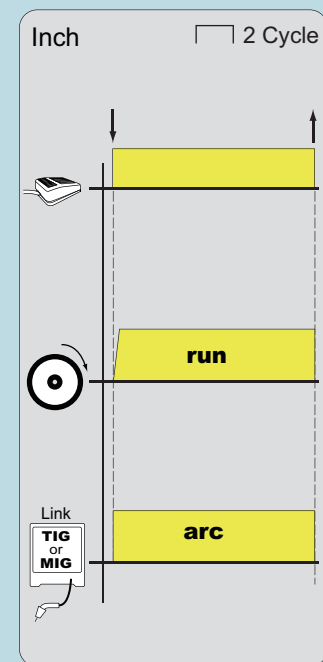


PPR-300 Pipe Roller

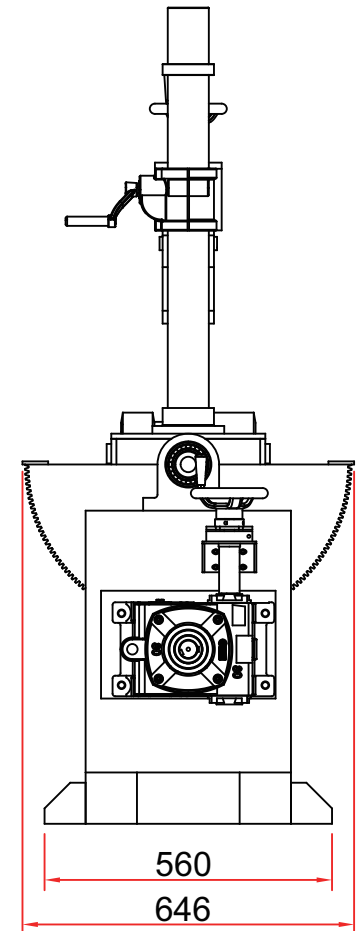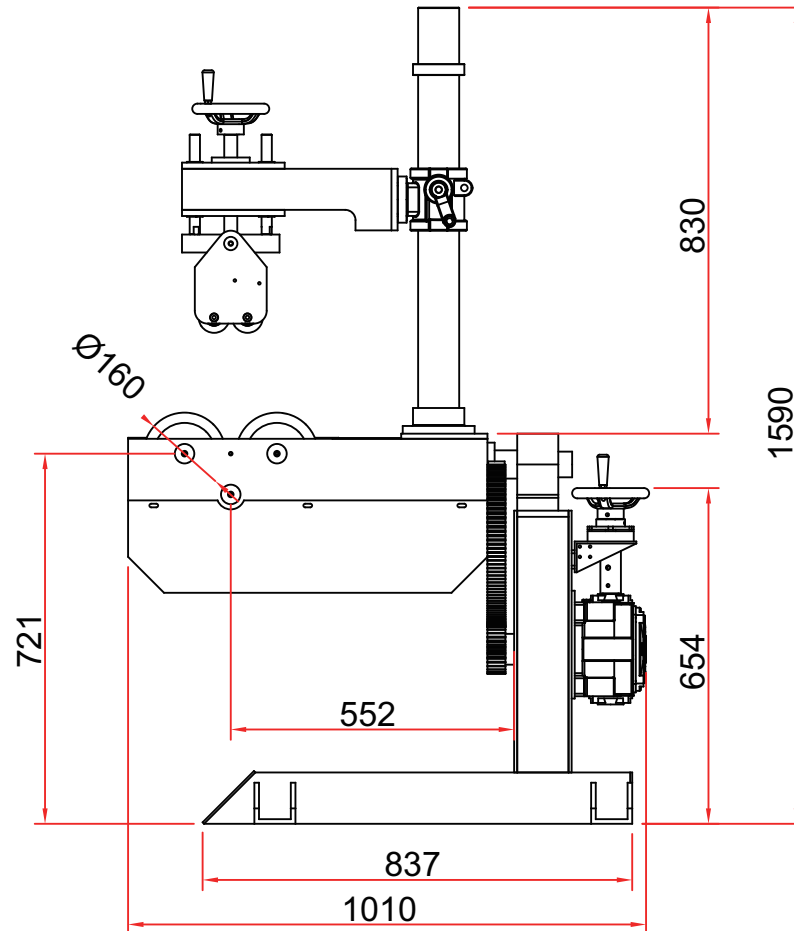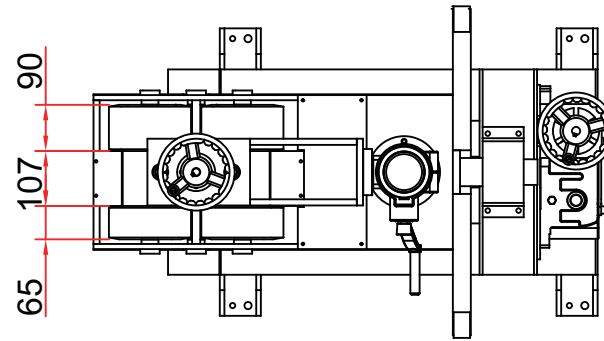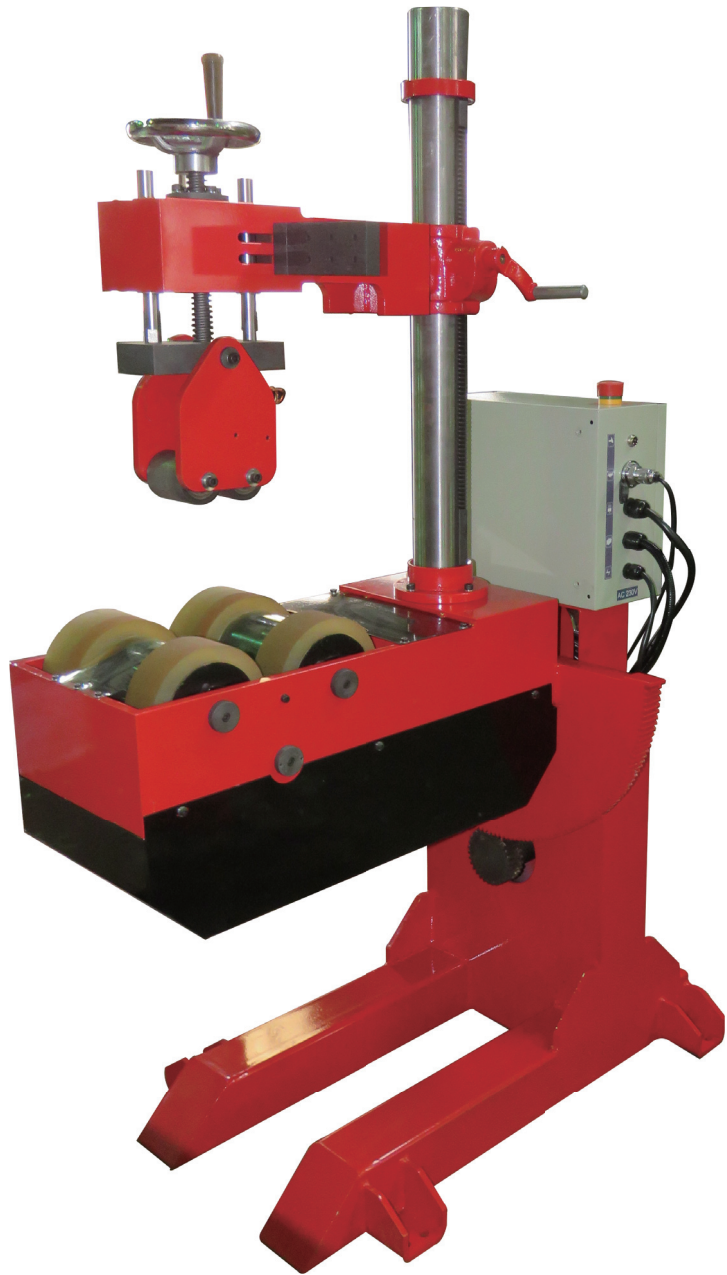


UNIT:mm


PPR-300 Pipe Roller

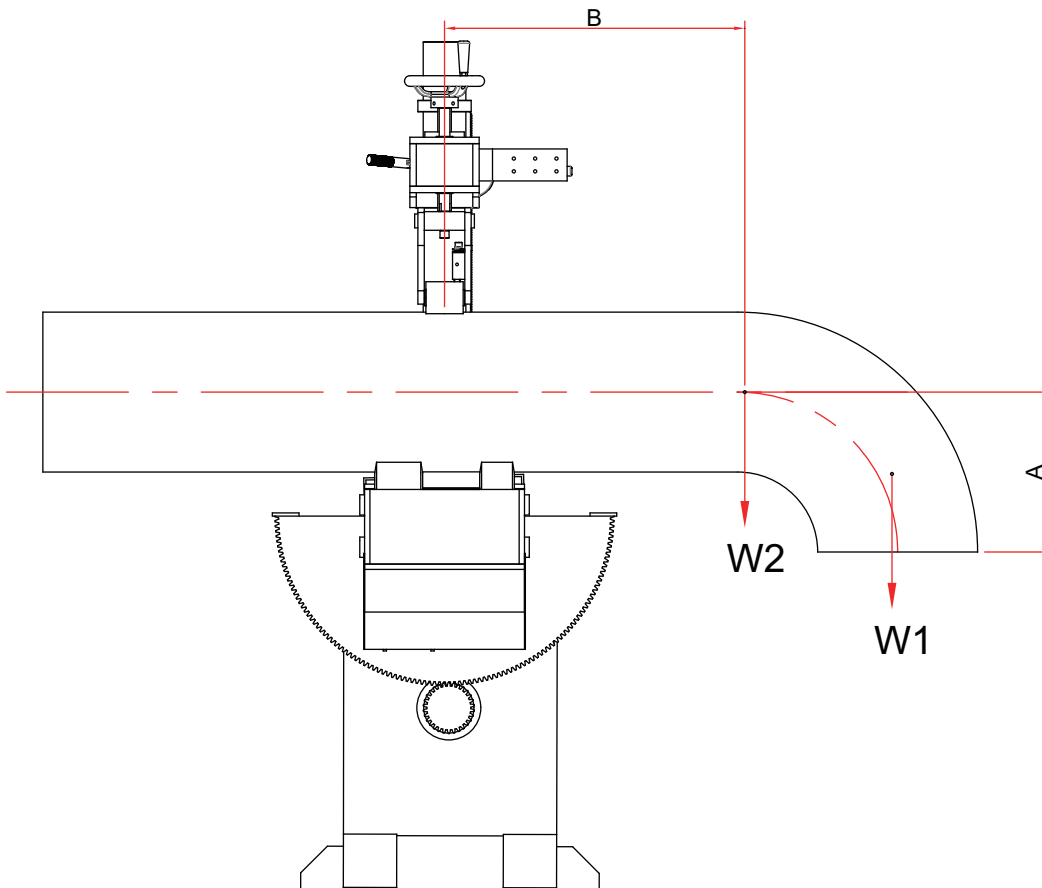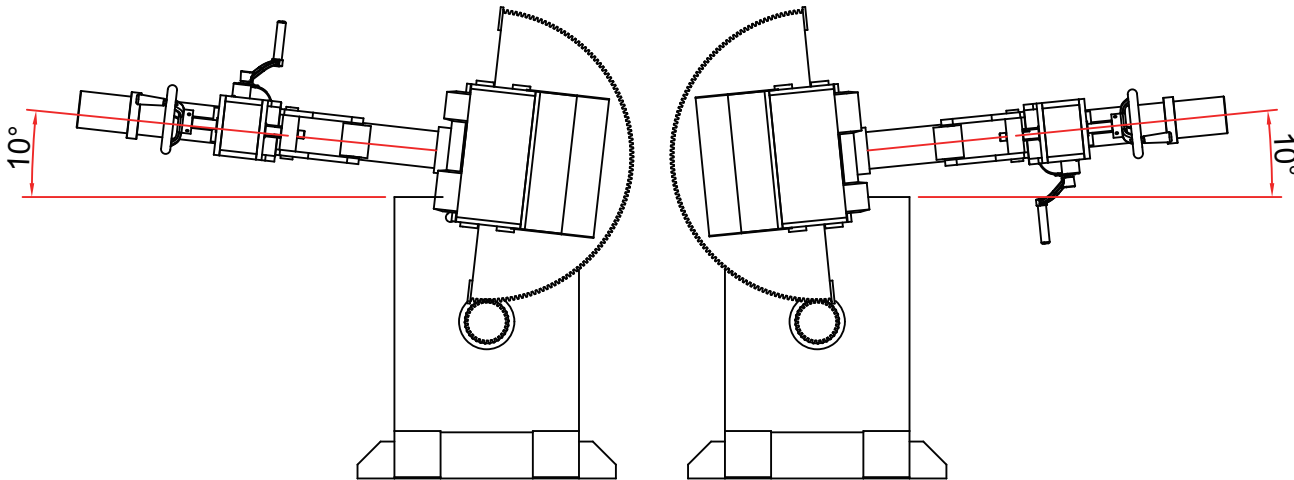

PPR-300 Positioner Eccentric Load

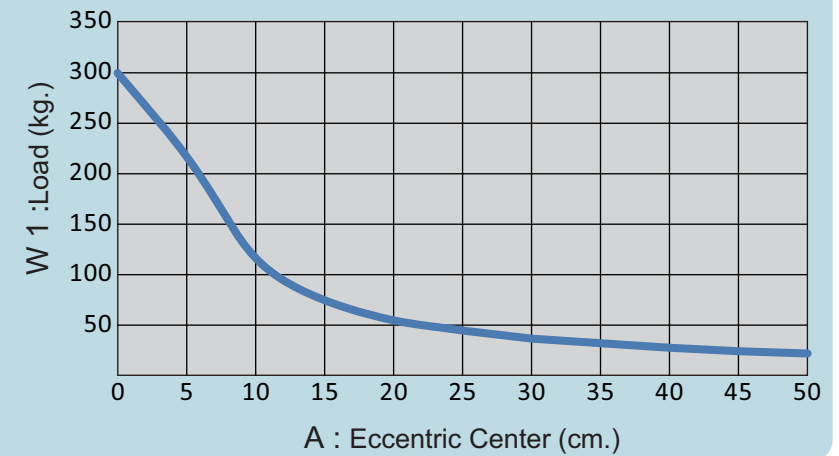

PPR-300 Center of Gravity

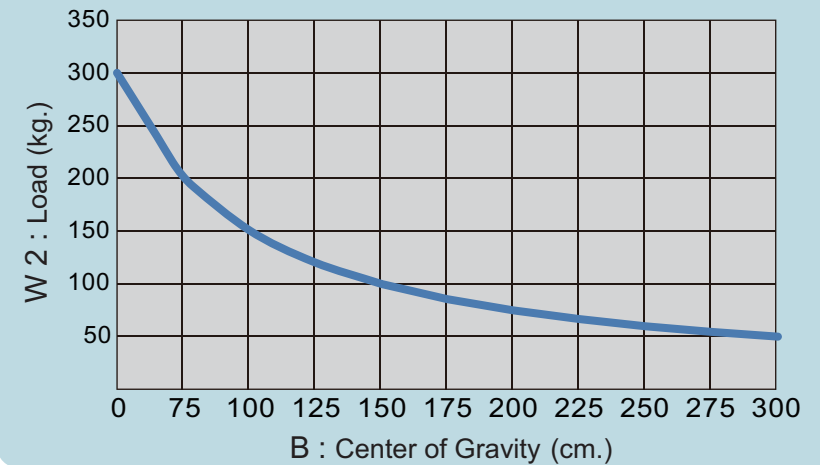

PPR-300 Pipe Roller

The pressure roller can be adjusted after brachet (KKD-04GH-1) is locked first.

KKD-04GH-1 Brachet

Lock

