

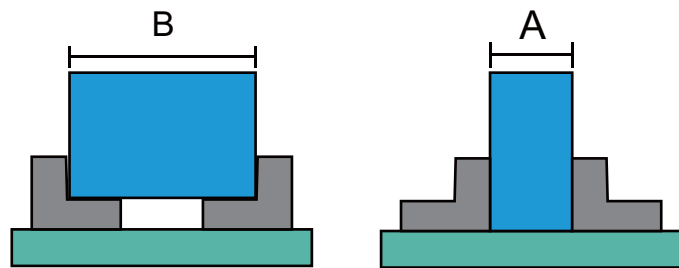


RD_X Self-centering welding chucks

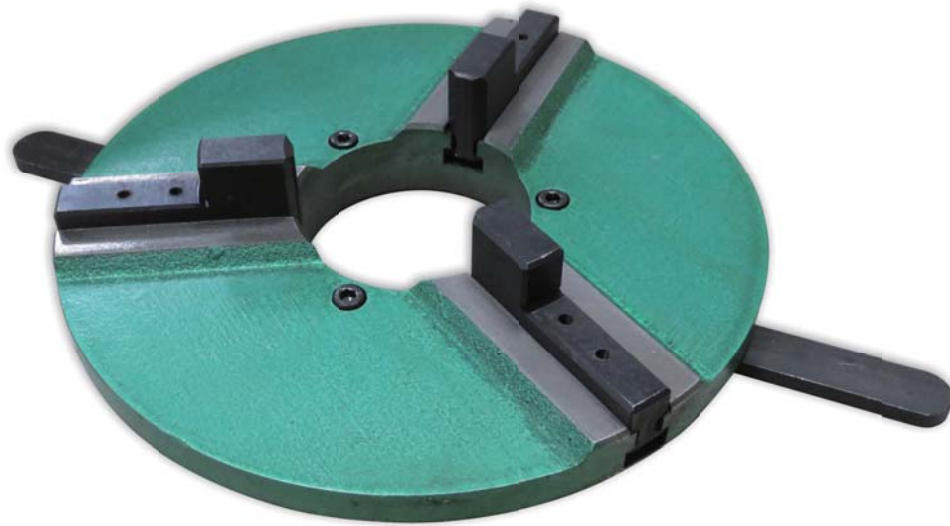

Features

- Can use outside clamping and inside clamping at the same time.
- Every jaw has two regular screw holes, can make special jaw by oneself according to the demand.
- It has holes of big size, can let the work piece be easy to pass through.
- The chucks is light weight and low center, less load to driving motor of positioner.
- It has a fast hands, easy loading and unloading.

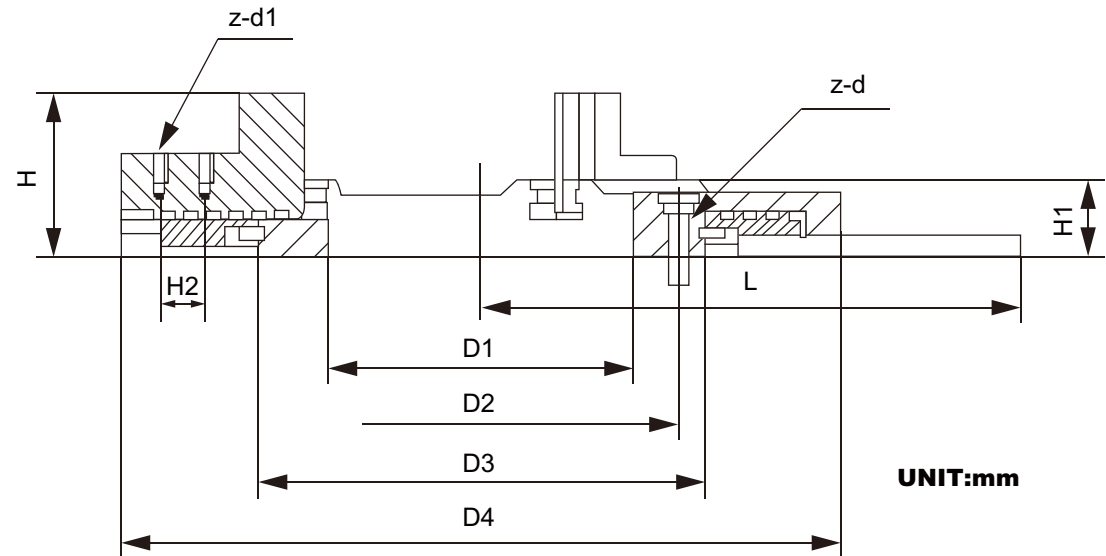

Parameters Table 1:Size of each item

Specification	D1	D2	D3	D4	H	H1	H2	L	z-d1	z-d
RD6X	80	100	120	200	67.5	39	21	200	2-M6	3-M8*35
RD8X	100	120	150	300	67.5	39	21	240	2-M6	3-M8*30
RD10X	170	220	250	400	95	45	25	300	2-M6	3-M10*40
RD13X	240	280	320	500	110	60	25	350	2-M6	3-M12*55
RD15X	365	400	425	600	170	105	40	425	2-M12	6-M12*110
RD20X	515	542.5	570	750	170	105	40	500	2-M12	6-M12*110

Parameters Table 2:Performance parameter

Specification	Allowable clamping force	Carrying capacity	Positive claw clamping rangeA	Reverse claw clamping rangeB
RD6X	200kg	30kg	φ 20-130	φ110-210
RD8X	250kg	120kg	φ 80-190	φ170-280
RD10X	350kg	240kg	φ120-250	φ250-380
RD13X	800kg	600kg	φ200-340	φ360-500
RD15X	1200kg	1000kg	φ150-410	φ400-620
RD20X	1400kg	1200kg	φ380-580	φ550-800